



K-UX

Special hydraulic tool for oil & gas industries


Minimal size

The drive unit features a cylinder with an extremely low-profile ratchet .
Fully height adjustable ratchet head ensures that full power is transmitted regardless of space restrictions

Maximum Power

From 3000 up to 15000 Nm high Power for high requirements .
Width across flats from 24 mm up to 170 mm to rise also greatest challenges.



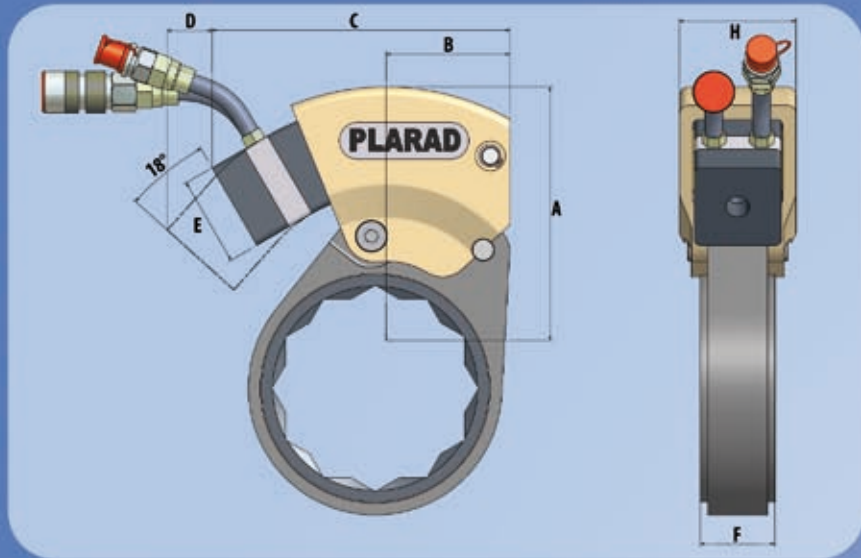

Type	K 30 TF	K 60 TF	K 150 TF	K 250 TF
Drive unit				
Range of capacity	300 up to 3.000 Nm	660 up to 6.600 Nm	1.100 up to 11.000 Nm	1.800 up to 18.000 Nm
Size >A<	74 mm	88 mm	99,5 mm	125,5 mm
Size >B<	74 mm	67 mm	83 mm	120 mm
Size >C<	163 mm	150 mm	180 mm	248,5 mm
Size >D<	21 mm	28 mm	35 mm	45 mm
Size >E<	45 mm	56 mm	60 mm	78 mm
Size >H<	63 mm	68 mm	78 mm	100 mm
Weight	4,8 kg	5,7 kg	8,6 kg	18,5 kg

Special hydraulic tool for oil & gas industries



Drive unit		K 30 TF	K 60 TF	K 150 TF	K 250 TF
Insert Type					
Open Ring spanner	A/F (mm)	24 - 95 mm	24 - 95 mm	32 - 110 mm	60 - 135 mm
	A/F (inch)	1.1/4" - 3.1/2"	1.1/4" - 3.1/2"	1.7/16" - 3.7/8"	2.3/8" - 4.1/8"
	Size >F< (see above)	20 - 50 mm	20 - 50 mm	20 - 55 mm	35 - 65 mm
Ring spanner	A/F (mm)	27 - 95	27 - 95	32 - 110	60 - 135
	A/F (inch)	1.1/8 - 2.3/4	1.1/8 - 2.3/4	1.5/16 - 4.1/4	2.3/8 - 4.1/8
	Size >F< (see above)	20 - 40 mm	20 - 40 mm	20 - 55 mm	25 - 55 mm
RKF Ratched head	A/F (mm)	24 - 95	24 - 95	36 - 110	
	A/F (inch)	1.5/16 - 3.3/4	1.5/16 - 3.3/4	1.7/16 - 3.7/8	
	Size >F< (see above)	32 mm	32 mm	32 mm	



RKW Ratched head for interchangeable inserts					
Drive unit		K 30 TF	K 60 TF	K 150 TF	K 250 TF
RKW Ratched head	Size >F< (see above)	55 mm	55 mm	55 mm	60 mm
RKW inserts	A/F (mm)	24 - 85 mm	24 - 85 mm	27 - 100 mm	75 - 120 mm
	A/F (inch)	5/8" - 3.3/8"	5/8" - 3.3/8"	5/8" - 3.15/16"	2.0" - 4.3/4"